

# H<sub>2</sub>flo<sup>®</sup>

Pool Equipment

## Premium Cartridge Filter

- Smart technology
- Efficient and reliable
- Simple to operate



## Built Tough for Australian Conditions

- Flexible configuration
- Oil filled pressure gauge
- Easy to remove lid
- Self lock on lock ring
- 3 inlets and 1 outlet
- Barrel union connections
- Less maintenance required
- Available in 5 sizes

**PoolSystems**

pool • spa • lifestyle™

[www.poolsystems.com.au](http://www.poolsystems.com.au)



Made in  
Australia



Pool Equipment

# Premium Cartridge Filter

## Pool Filtration – Made Easy

The H<sub>2</sub>flo cartridge filter is a compact and unique design suitable for any Australian swimming pool. This cartridge filter is ideal for all spas and swimming pools where waste water disposal or water restrictions are in force. The H<sub>2</sub>flo cartridge filter achieves remarkable water filtration and clarity but is also environmentally friendly and responsible.

The H<sub>2</sub>flo cartridge filter reduces maintenance while saving thousands of litres of water every year. It takes approximately 100 litres of water to clean the filter elements instead of backwashing thousands of litres of water when cleaning other filtration methods. The H<sub>2</sub>flo cartridge filter makes it easier to be responsible with water. The 50mm water connections glue in for fast installation and have the capacity to handle high flow rates.



All H<sub>2</sub>flo filters incorporate high quality elements with antimicrobial treatment. The antimicrobial treatment lasts for the life of the filter element and reduces the growth of algae, bacteria and microbes in a unique process that reduces maintenance and makes swimming and bathing safe for the whole family.

### Warranty

5 year warranty on filter body, lid and locking ring, 12 month warranty on filter element, 12 month warranty on o’rings and gasket seals

### Sizing your H<sub>2</sub>flo filter

Model	Flow Rate Lpm	Filter Area m <sup>2</sup>	Pump Output watts	Weight kg	Dim ‘A’ mm	Dim ‘B’ mm
CF75	290	7.0	550-1100	8.0	465	345
CF100	375	9.4	750-1100	15.5	665	345
CF150	445	14.0	750-1500	16.5	665	345
CF200	490	19.0	750-1500	24.0	865	345
CF250	515	24.0	750-1500	25.0	865	345

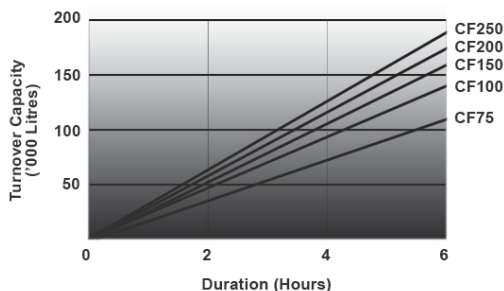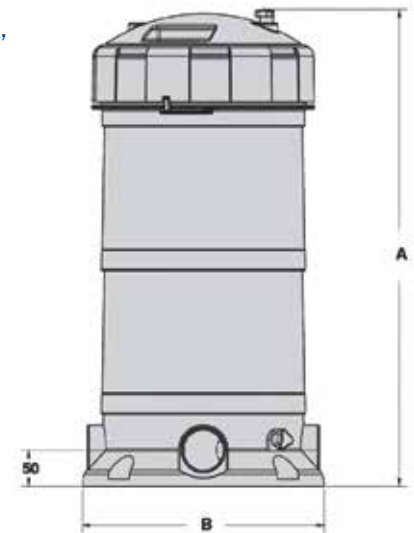

Available from:

